

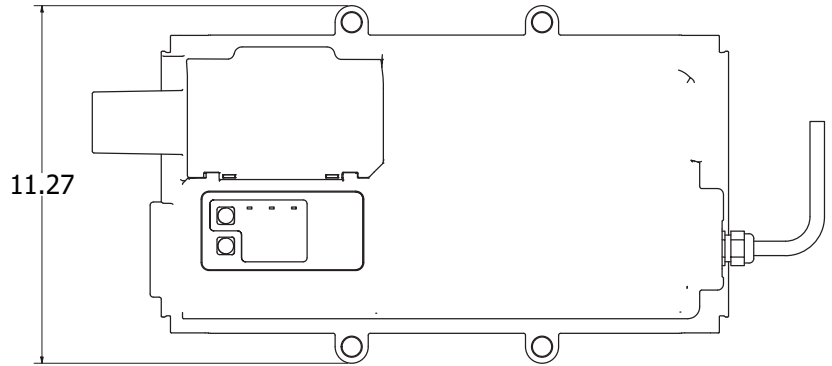


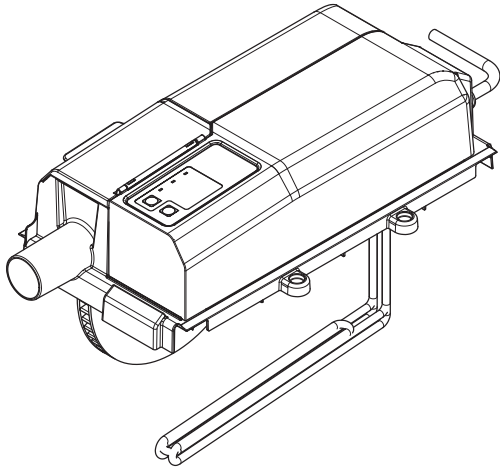


TOP VIEW

SIDE VIEW

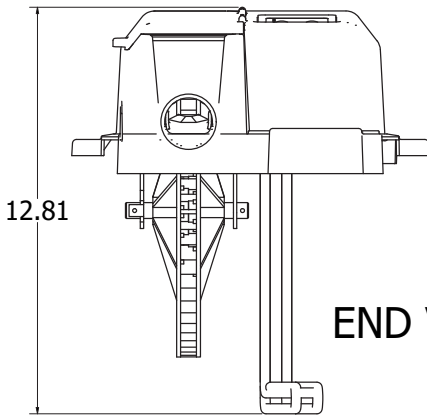

END VIEW

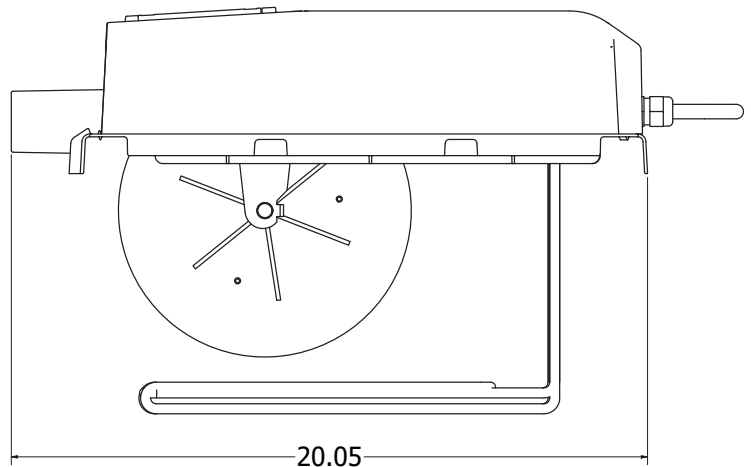

FEATURES:

- Fully automatic self cleaning cycle. Actively removes collected grease & oils from tank without any operator assistance. Comes complete with Digital Control user interface.
- Constructed of corrosion resistant materials suitable for installation in virtually any location.
- Integrated Motor/Grease Outlet/Heater/Lid enables a fast, do-it-yourself unit operation reversal.

TECHNICAL DATA

Electrical: _____ 115 VAC, 50/60 Hz, 1173 Watts (10.2 Amps)*
 Number of Skimming Wheels: _____ 1
 Skimming Rate: _____ 9 Pounds (4.08 Kg) Per Hour

**220-240V Electrical Configurations Available*

